


AL-10V2.0

Intel® Alder Lake-U/P Series Processor based Mini ITX Motherboard

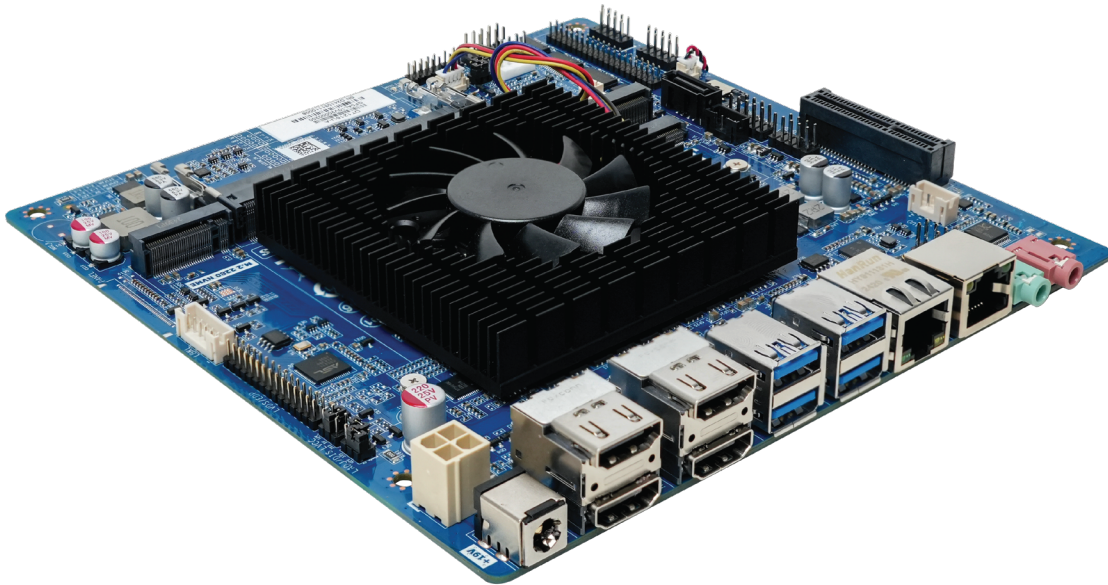

Features

- CPU: Intel® Alder Lake-U/P series processor
- Memory: Dual channel SO-DIMM DDR4 up to 64GB
- GPU: Intel Iris® Xe Graphics eligible/UHD Graphics depends on CPU
- Ethernet Controller: Intel i225/i226 + Intel i219
- Storage: M.2 Slot for NVMe SSD, M.2 Slot for SATA SSD/4G, SATA3.0
- Expansion: M.2 for WiFi, PCIe 4X, Nano SIM
- Power: 19V DC-in



IoT Solutions
Alliance
Industrial Solution
Builders Specialist

Maxtang®

MAXIMIZING YOUR COMPUTING PRODUCTIVITY

Introduction

Maxtang AL-10 is designed with the 12th Gen Intel Alder Lake P series and U series processor, up to 12 cores and 16 threads, 2.47x times faster graphics performance than the previous. Based on a small form factor design great for IoT deployments that require high-performance, enhanced graphics density. Supports 2xSO-DIMM DDR4 up to 64GB, features 4xHDMI2.0, 6xCOM, 4xUSB3.2+4xUSB2.0, 2xLAN, 1xSATA, 3xM.2 connector, PCIe4X, GPIO and optional TPM2.0 for added security.

The AL-10 drives more values for IoT use cases with differentiated capabilities, offers an immersive experience by Intel Xe Graphics/UHD graphics (varies on CPU), and supports 4K independent displays through 4xHDMI+1xLVDs/eDP. This motherboard is suitable for surveillance, digital signage, electronic gaming machine, and thin client.

*More AL10 with power-efficient processors (TDP: 15W) are on their way...

I/O Interfaces



H/W Monitor




Watchdog



GPIO




Brightness

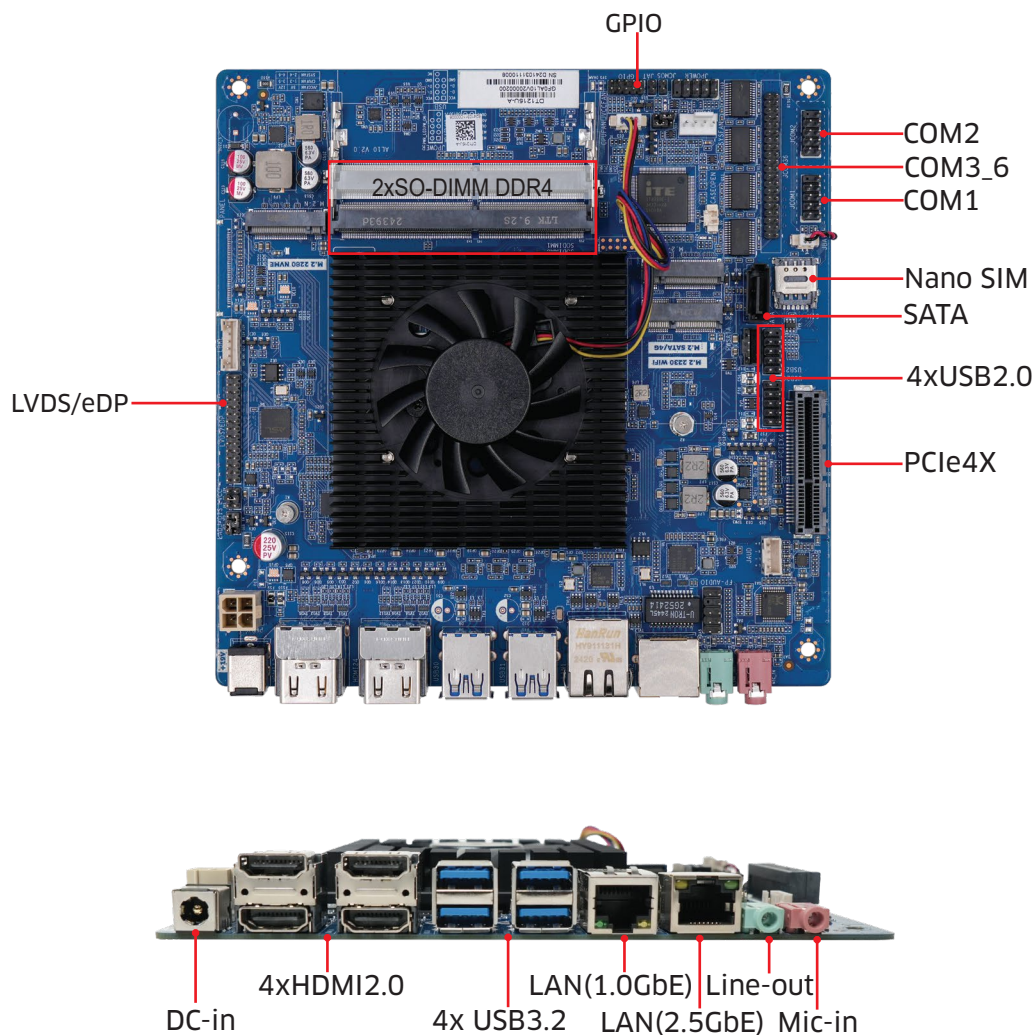

Technical Specifications

Processor	Alder Lake P Series	i7-1260P	i5-1240P	i3-1220P
	Total Cores/Threads	12C/16T	12C/16T	10C/12T
	P-core Max Turbo Frequency	4.70 GHz	4.40 GHz	4.40 GHz
	E-core Max Turbo Frequency	3.40 GHz	3.30 GHz	3.30 GHz
	Cache	8 MB	12 MB	12 MB
	Processor base Power	28 W	28 W	28 W
Processor	Alder Lake U Series	i7-1255U	i5-1235U	i3-1215U
	Total Cores/Threads	10C/12T	10C/12T	6C/8T
	P-core Max Turbo Frequency	4.70 GHz	4.40 GHz	4.40 GHz
	E-core Max Turbo Frequency	3.50 GHz	3.30 GHz	3.30 GHz
	Cache	12 MB	12 MB	10 MB
	Processor base Power	15 W	15 W	15 W
Memory	BIOS	AMI UEFI BIOS		
	Type	Dual Channel SO-DIMM DDR4		
	Max.Capacity	64GB		
Display	GPU	Intel Iris® Xe Graphics eligible/UHD Graphics depends on CPU		
	Interface	4x HDMI2.0+1x LVDS/eDP		
Ethernet		up to four screens for multiple displays.		
	Controller	1x Intel i226 Data Rate Per Port: 2.5GbE		
		1x Intel i219 Data Rate Per Port: 1.0GbE		
	Interface	2x RJ45		
Audio	Wake on LAN	Yes		
	Audio Codec	Realtek HD		
Hardware	Interface	1xLine-out, 1xMic-in, supports audio header and amplifier header		
		CPU system temperature, onboard voltage, watchdog, auto power on		
Storage	M.2	1×M.2_2280 Slot for NVMe SSD		
	M.2	1×M.2_2242 Slot for SATA SSD/4G		
	SATA	1xSATA3.0 interface		
Expansion	M.2	1xM.2_2230 Slot for Wi-Fi, support Intel® Integrated Connectivity (CNVi)		
	PCIe	1*PCIe4X		
	SIM	1xNano SIM		
Other I/O	COM	6xCOM: 6*RS232(default) or 5*RS232+1*RS485(COM1)		
	USB3.2	4		
	USB2.0	4*header		
	GPIO	8		
	TPM2.0	Onboard, optional		
Dimension	Size	170mm×170mm		
	Board Type	Mini-ITX		
Power	Standard Port	19V DC-in		
	Peripheral Input	For Fan and SATA		
	Operating Temp.	-20°C ~60°C		
	Storage Temp.	-40°C ~80°C		
Operating System		Win10/11 64 bit, Linux 64 bit		

Functional Block Diagram

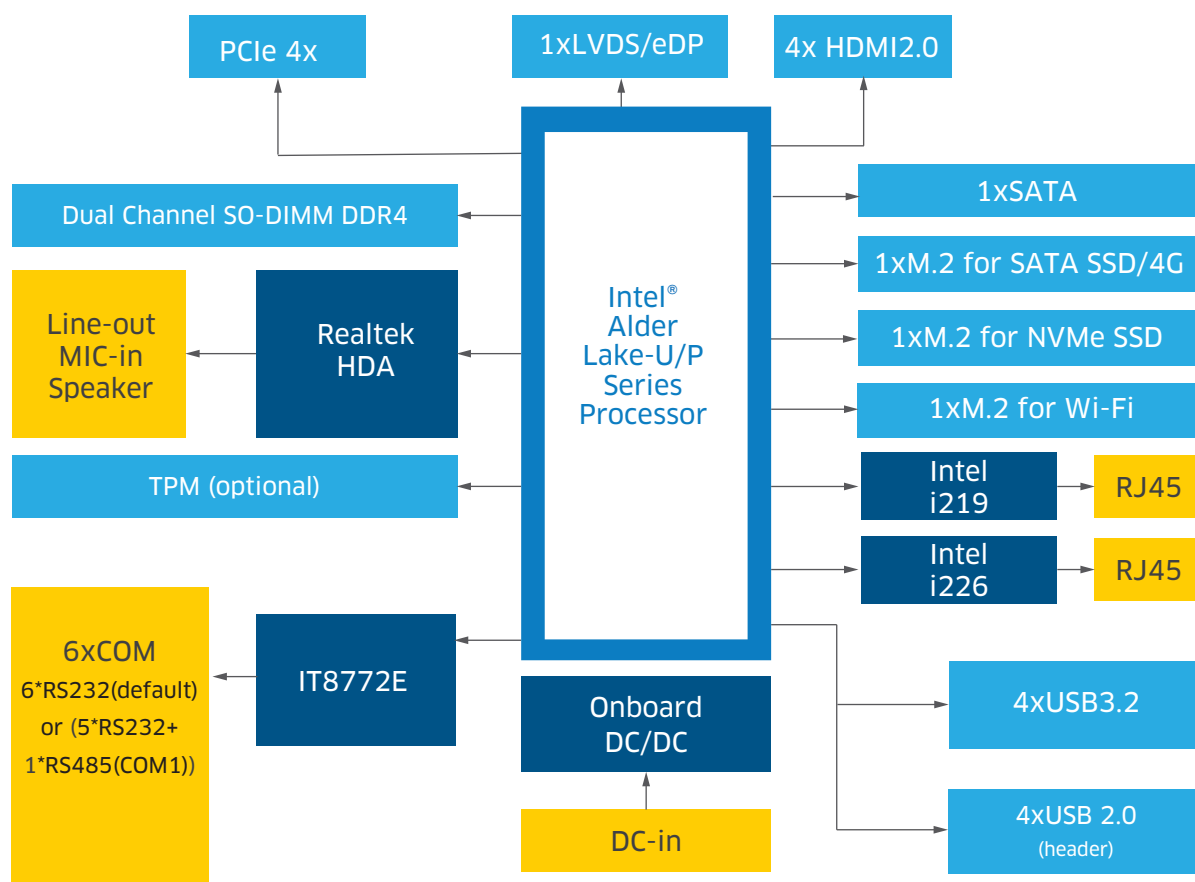

Order Information

Model Name	Description
DT1250P-A	DT MINI-ITX Intel Core i5-1250P AL10 2LAN 6*RS232 4HDMI+LVDS
DT1235U-A	DT MINI-ITX Intel Core i5-1235U AL10 2LAN 6*RS232 4HDMI+LVDS
DT1255U-A	DT MINI-ITX Intel Core i7-1255U AL10 2LAN 6*RS232 4HDMI+LVDS

*For customized options, please consult regional sales. And please confirm the model name and description before purchasing. *The model name and description might vary due to inventory changes.

HDMI™
HIGH-DEFINITION MULTIMEDIA INTERFACE

Copyright © 2024 Maxtang Technology Co., Ltd. All rights reserved. All data is for information purposes only and not guaranteed for legal purposes. Information has been carefully checked and is believed to be accurate however, no responsibility is assumed for inaccuracies. Maxtang and the Maxtang logo and all other trademarks or registered trademarks are the property of their respective owners and are recognized. The terms HDMI, HDMI High-Definition Multimedia Interface, HDMI Trade Dress, and HDMI Logos are trademarks or registered trademarks of HDMI Licensing Administrator, Inc.